



CTCL01 Series



Electrical Characteristic						Mechanical Dimension					
Part No.	I_R (A)	turns ratio	Acc.Class (%)	Frequency (Hz)	Sendary load (Ω)	ID	W	H	L	F	E
						mm / inch					
CTCL01-08-500-21P	1-50	1:1000 1:2000 1:2500	0.1,0.2	50-400	≤ 50	8.0	46.0	27.0	171.0	30.0	27.0
						0.32	1.81	1.06	6.73	1.18	1.06
CTCL01-13-201-21P	5-200			0.1,0.2	50-400	≤ 5	13.0	52.0	27.0	171.0	34.0
									0.51	2.05	1.06
CTCL01-20-201-21P	5-200		0.1,0.2	50-400	≤ 5	20.0	52.0	27.0	180.0	40.2	42.0
									0.79	2.05	1.06

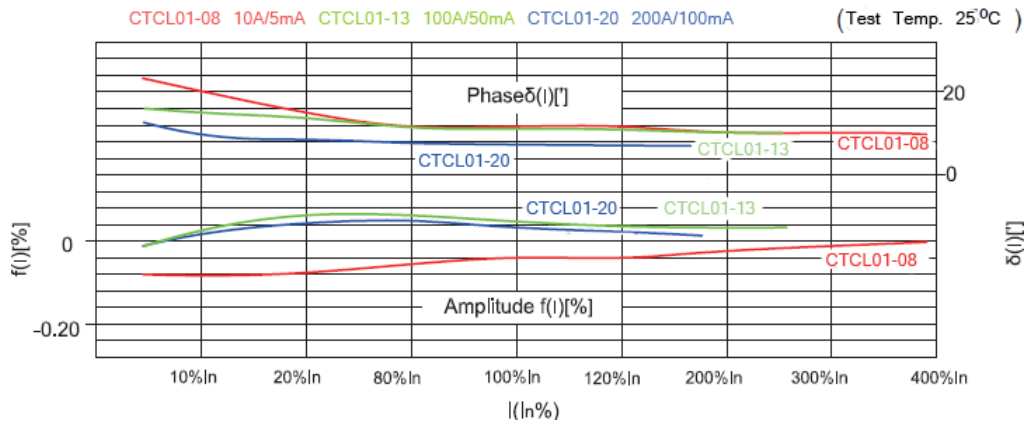

Definition:

I_R : Rated Current

Acc.Class: Accuracy class.

Remark:

1. Frequency 50Hz/60Hz.
2. Operating temperature: -25°C~70°C.
3. All current ,voltage refer to rms value.
4. RoHS compliant.
5. Dielectric Resistance : 1000M Ω @ 500 Vdc
6. High Potential : 2500V/min
7. Case Material : ABS.
8. Voltage Rank : 600Vac (isolated condition) , 30Vac (bareness condition)