



# CTCL04 Series



Electrical Characteristic						Mechanical Dimension				
Part No.	I <sub>R</sub> (A)	turns ratio	Acc.Class (%)	Frequency (Hz)	Sendary load (Ω)	ID	W	H	L	E
						mm / inch				
CTCL04-60-601-31N	20-600	1:1000	0.5,1	50-400	≤ 2	60.0	96.0	24.0	183.0	60.0
		1:2000				2.36	3.78	0.95	7.21	2.36
		1:2500								

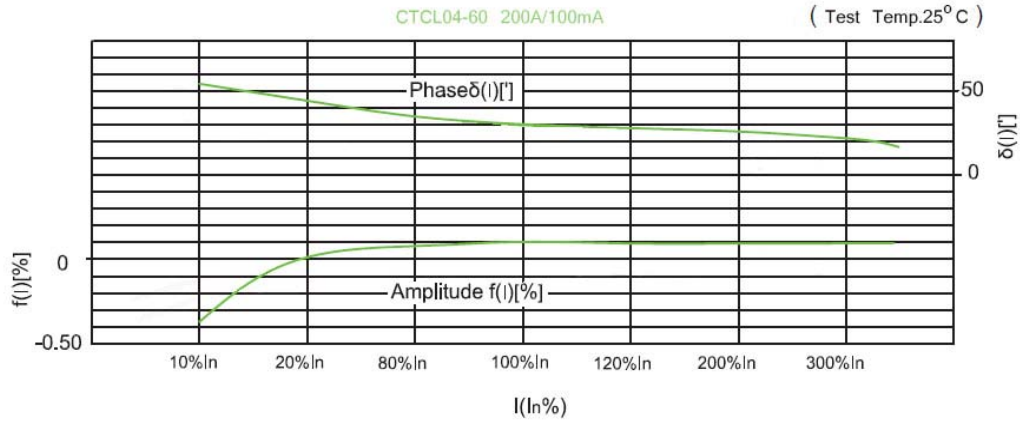

**Definition:**

I<sub>R</sub> : Rated Current

Acc.Class: Accuracy class.

**Remark:**

1. Frequency 50Hz/60Hz.
2. Operating temperature: -25°C~70°C.
3. All current ,voltage refer to rms value.
4. RoHS compliant.
5. Dielectric Resistance : 1000MΩ @ 500 Vdc
6. High Potential : 2500V/min
7. Case Material : ABS.
8. Voltage Rank : 600Vac (isolated condition) , 30Vac (bareness condition)