




CTP03-27 Series

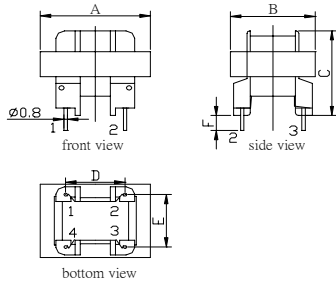

Test Circuit

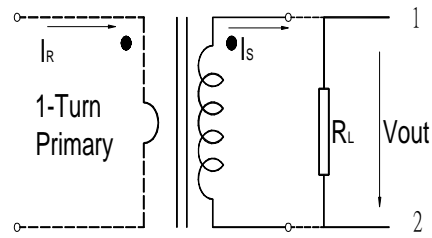

Electrical Characteristic										Mechanical Dimension					
Part No.	I_R (A)	V_{out} (V)	Acc.Class (%)	I_{min} (A)	I_{max} (A)	R_L (Ω)	f (%)	δ ($^{\circ}$)	DCR (Ω)	A(max)	B(max)	C(max)	D(max)	E(max)	F(± 3)
										mm / inch					
CTP03-27-300-41N	0.03~30	0.999	3	0.03	65	100	-0.200	260	426	$\frac{27.8}{1.09}$	$\frac{31.30}{1.23}$	$\frac{22.85}{0.90}$	$\frac{11.7}{0.46}$	$\frac{12.5}{0.49}$	$\frac{6.0}{0.24}$

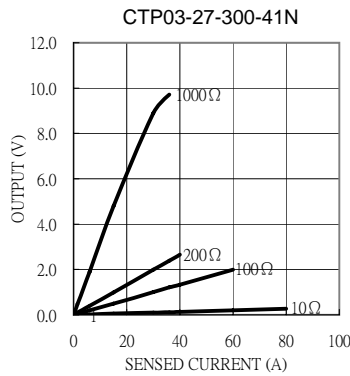

Definition:

- I_R : Rated Current
- V_{out} : Output voltage.
- Acc.Class: Accuracy class.
- I_{min} : Min. detecting current which remains linearity.
- I_{max} : Max. detecting current which remains linearity.
- R_L : Load resistance.
- $f(\%)$: Ratio error.
- $\delta(\text{'})$: Phase shift.
- DCR: Secondary Winding DC Resistance.

Remark:

1. Frequency band :50Hz~60Hz.
2. Operating temperature: -25 $^{\circ}$ C~80 $^{\circ}$ C.
3. All current ,voltage refer to rms value.
4. RoHS compliant.
5. Hi-Pot: 2500V_{RMS}/1min between windings.
6. Formula of 2nd output : $V_{out}=I_R \cdot R_L / N(\text{Turns})$.
7. Product parts meet UL requirements.