




CTP04-65 Series



Test Circuit

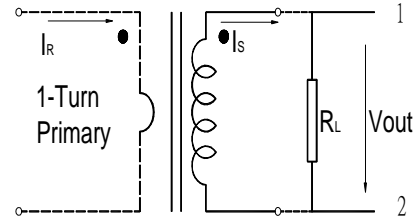

Electrical Characteristic										Mechanical Dimension			
Part No.	I_R (A)	V_{out} (V)	Acc.Class (%)	I_{min} (A)	I_{max} (A)	R_L (Ω)	f (%)	δ ($^{\circ}$)	DCR (Ω)	A(max)	B(max)	C(max)	D(max)
										mm / inch			
CTP04-65-300-21N	0.03~30	1.232	2	0.03	65	100	-1.240	69.6	88	$\frac{65.05}{2.56}$	$\frac{25.25}{1.00}$	$\frac{18.85}{0.74}$	$\frac{68.45}{2.70}$

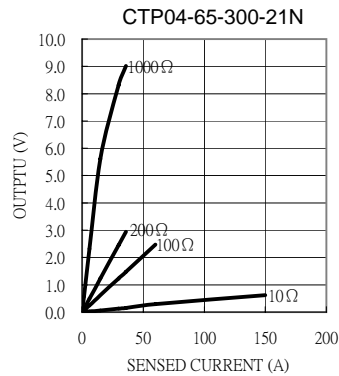

Definition:

- I_R : Rated Current
- V_{out} : Output voltage.
- Acc.Class: Accuracy class.
- I_{min} : Min. detecting current which remains linearity.
- I_{max} : Max. detecting current which remains linearity.
- R_L : Load resistance.
- $f(\%)$: Ratio error.
- $\delta(\text{'})$: Phase shift.
- DCR: Secondary Winding DC Resistance.

Remark:

1. Frequency band :50Hz~60Hz.
2. Operating temperature: -25 $^{\circ}$ C~80 $^{\circ}$ C.
3. All current ,voltage refer to rms value.
4. RoHS compliant.
5. Hi-Pot: 2500V_{RMS}/1min between windings.
6. Formula of 2nd output : $V_{out}=I_R \cdot R_L / N(\text{Turns})$.
7. Product parts meet UL requirements.