

HCOL08 Series

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary (high power) circuit and the secondary (electronic) circuit.



Operating performance (AT =25 °C)

Part No.		HCOL08-101-11	HCOL08-201-11	HCOL08-301-11	HCOL08-401-11	HCOL08-501-11
Primary nominal r.m.s. current	I_{PN} (A)	100	200	300	400	500
Primary current measuring range	I_P (A)	0~±200	0~±400	0~±600	0~±800	0~±1000
Supply voltage	V_{CC}	±15V (±5%)				
Output voltage	V_{OUT}	4V ±1% @± I_{PN} , $R_L = 10K\Omega$				
Current consumption	I_C	≤±10mA @ ± I_{PN}				
Offset voltage	V_O	<±0.03V @ $I_P=0, T_A=25^\circ C$				
Thermal drift of V_O	V_{OT}	≤±0.5mV/°C				
Thermal drift of V_{OUT}	$TC\epsilon_G$	<±0.04%/°C				
Response time	t_r	< 5µs				
Linearity	ϵ_L	≤±1% @0~± I_{PN}				
Accuracy	X	±1% @ I_{PN}				
Hysteresis offset voltage	V_{OH}	≤±20mV @±3 $I_{PN} \rightarrow 0$				
Isolation voltage	V_d	2.5KV @50(60)Hz/1min				
Frequency bandwidth	f	0~50KHz				

General data

Operating temperature	T_A	-25 ~ 85 °C
Storage temperature	T_S	-40 ~ 100 °C
Mass	m	58g
Note		Insulated plastic case recognized according to UL 94-V 0

Applications


1.AC variable speed drives and servo motor drives	4.Static converters for DC motor drives
2.Battery supplied applications	5.Switched Mode Power Supplies(SMPS)
3.Uninterruptible Power Supplies(UPS)	6.Power supplies for welding applications

Advantages

1.No insertion losses	4.Only one design for wide current ratings range
2.Low temperature drift	5.High immunity to external interference
3.Low power consumption	6.Current overload capability

HCOL08 Series

Connection

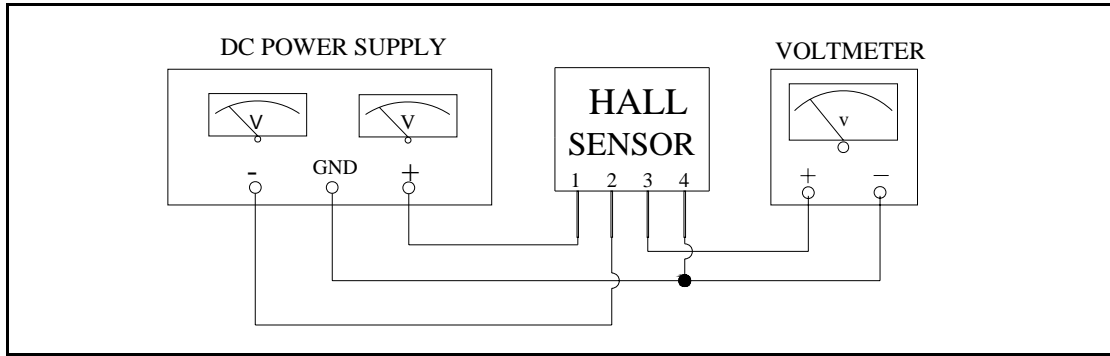

Dimensions (unit: mm/inch)

