
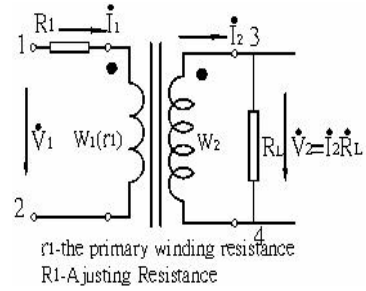


PTS01-28 Series



Electrical Characteristic						Mechanical Dimension						
Part No.	Vin	Vout	RL	IR	Acc.Class	A(max)	B(max)	C(max)	D(max)	E(max)	F±1	G±0.1
	(V)	(mV)	(Ω)	mA	%	mm / inch						
PTS01-28-201-21P	150, 200	100	100(50)	1/1, 2/2	0.1,0.2	$\frac{28.5}{1.12}$	$\frac{28.7}{1.13}$	$\frac{24.4}{0.96}$	$\frac{20.2}{0.796}$	$\frac{20.2}{0.80}$	$\frac{7.0}{0.28}$	$\frac{0.8}{0.03}$

Application:

Transducers, Instrument Meters, Intelligent High Voltage Switches.

Remark:

1. Operating temperature: -25°C~80°C.
2. RoHS compliant.
3. Hi-Pot: 2500V_{RMS}/1min between windings.
4. Product parts meet UL requirements.

Definition:

- V_{in}** : Input Voltage.
- δ(')** : Phase shift.
- I_R** : Rated Current.
- V_{out}** : Output Voltage.
- R_L** : Loaded Resistances.
- Acc. Class**: Accuracy class at 50Hz