


ZTC01 Series

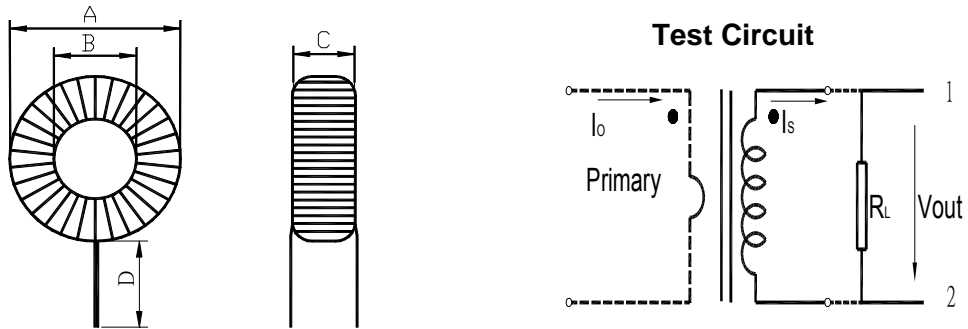

Electrical Characteristic						Mechanical Dimension			
Part No.	I_R	V_{out}	I_0	R_L	DCR	A(max)	B(max)	C(max)	D(max)
	A	mV	mA	Ω	$\Omega(max)$	mm / inch			
ZTC01-16-150-1	15(30)	8	11.25	1K	41	$\frac{16.2}{0.64}$	$\frac{8.0}{0.32}$	$\frac{4.6}{0.18}$	$\frac{87(\pm 3)}{3.43}$

Overinput property : $V = (V_0 - V_0') / V_0 * 100\%$

V_0 is the normal output voltage while feeding assigned leakage current I_{0U} .

V_0' is the output voltage after overinput.

At that time feeding a direct current I_{DC} which value is equal to corresponding rated current.

Temperature property : $T = [V_0(T_0) - V_0'(T)] / V_0(T_0) * 100\%$


$V_0(T_0)$ is the normal output voltage at 25°C while feeding assigned leakage current I_0 .

$V_0'(T)$ is the output voltage at some temperature from -10°C up to 80°C under the same feeding condition.

Application:

- 1.Heater
- 2.Over Current Sensor
- 3.Earth leakage breaker
- 4.Ground fault circuit interrupter
- 5.Residual current circuit breaker
- 6.U.P.S. (Uninterrupted Power System)
- 7.Protection of Inverter (Air Conditioner etc)
- 8.Application leakage circuit interrupter
- 9.E.O.C.R. (Electronic Over Current Relay)
- 10.Motor Control (Motor Pump,Heat Control)

ZCT Unbalance Test

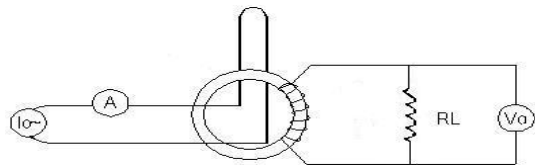

Definition:

I_R : Rated Current

I_0 : Detecting Current

R_L : Load Resistance.

V_{out} : Output Voltage

DCR: Secondary Winding DC Resistance.

Remark:

1. Frequency band :50Hz~60Hz.
2. Operating temperature: -25°C~80°C.
3. RoHS compliant.
4. Hi-Pot: 2500V_{RMS}/1min between windings.
5. Product parts meet UL requirements.